


Serie V4

Rostfreie Gasdruckfedern Stainless steel Gassprings

Kolbenstange
Piston rod
Druckrohr
Cylinder
Anschlüsse
Fittings

W. 1.4404 / AISI 316L
AISI 316L
W. 1.4571 / AISI 316Ti
AISI 316Ti
W. 1.4404 / AISI 316L
AISI 316L

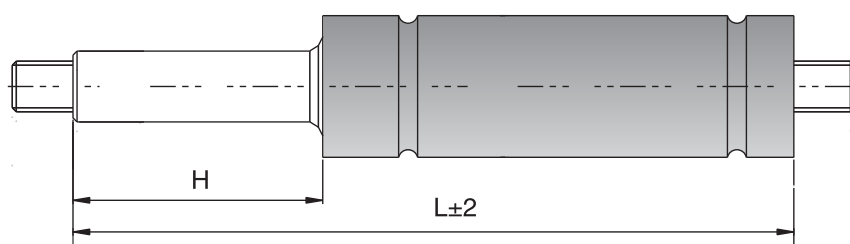

Höchste Korrosionsbeständigkeit, Ventil, Abstreifer FKM, nichtmagnetisch, Edelstahl-Design
Highest corrosion resistance, valve, wiper ring, unmagnetic, stainless steel design

Typ	Ausschubkraft F1 (Newton)	Standardlänge GL (mm)	Progression	Extras
Type	Extension force	Standard length	Progression	Extras
G 06 15	40-400	$L = 2 \times H + 55$	25%	4,6,7
G 08 19	60-700	$L = 2 \times H + 70$	30%	4,6,7,8
G 10 23	100-1100	$L = 2 \times H + 70$	30%	4,6,7,8
G 10 28	100-1100	$L = 2 \times H + 70$	20%	4,6,7,8
G 14 28	200-2500	$L = 2 \times H + 107$	40%	4,6,7,8
G 20 40	300-5000	$L = 2 \times H + 138$	40%	4,6,7

Kolbenstangen, Zylinderanschlüsse und Standardhübe entsprechen der jeweiligen Standardbaureihe Normalstahl.
Augenanschlüsse am Zylinder entsprechen dem jeweiligen Kolbenstangenanschluss.

Piston rods, end fittings and strokes are equivalent to the according standard series in normal steel. Eyelets on the cylinder are equivalent to the according piston rod end fittings.