


# Zugfeder Z 6-19 Tension spring Z 6-19

**Zugkraft F1**  
Tension force F1  
**Progression**  
Progression  
**Kolbenstange**  
Piston rod  
**Druckrohr**  
Cylinder  
**Anschlüsse**  
Fittings

**30N - 330 Newton**  
30N - 330 Newton  
**10 %**  
10 %  
**Ø 6 mm Stahl hartverchromt**  
Ø 6 mm steel chromium plated  
**Ø 19 mm Stahl schwarz lackiert**  
Ø 19 mm steel black spray coated  
**Stahl blau verzinkt**  
steel zinc plated

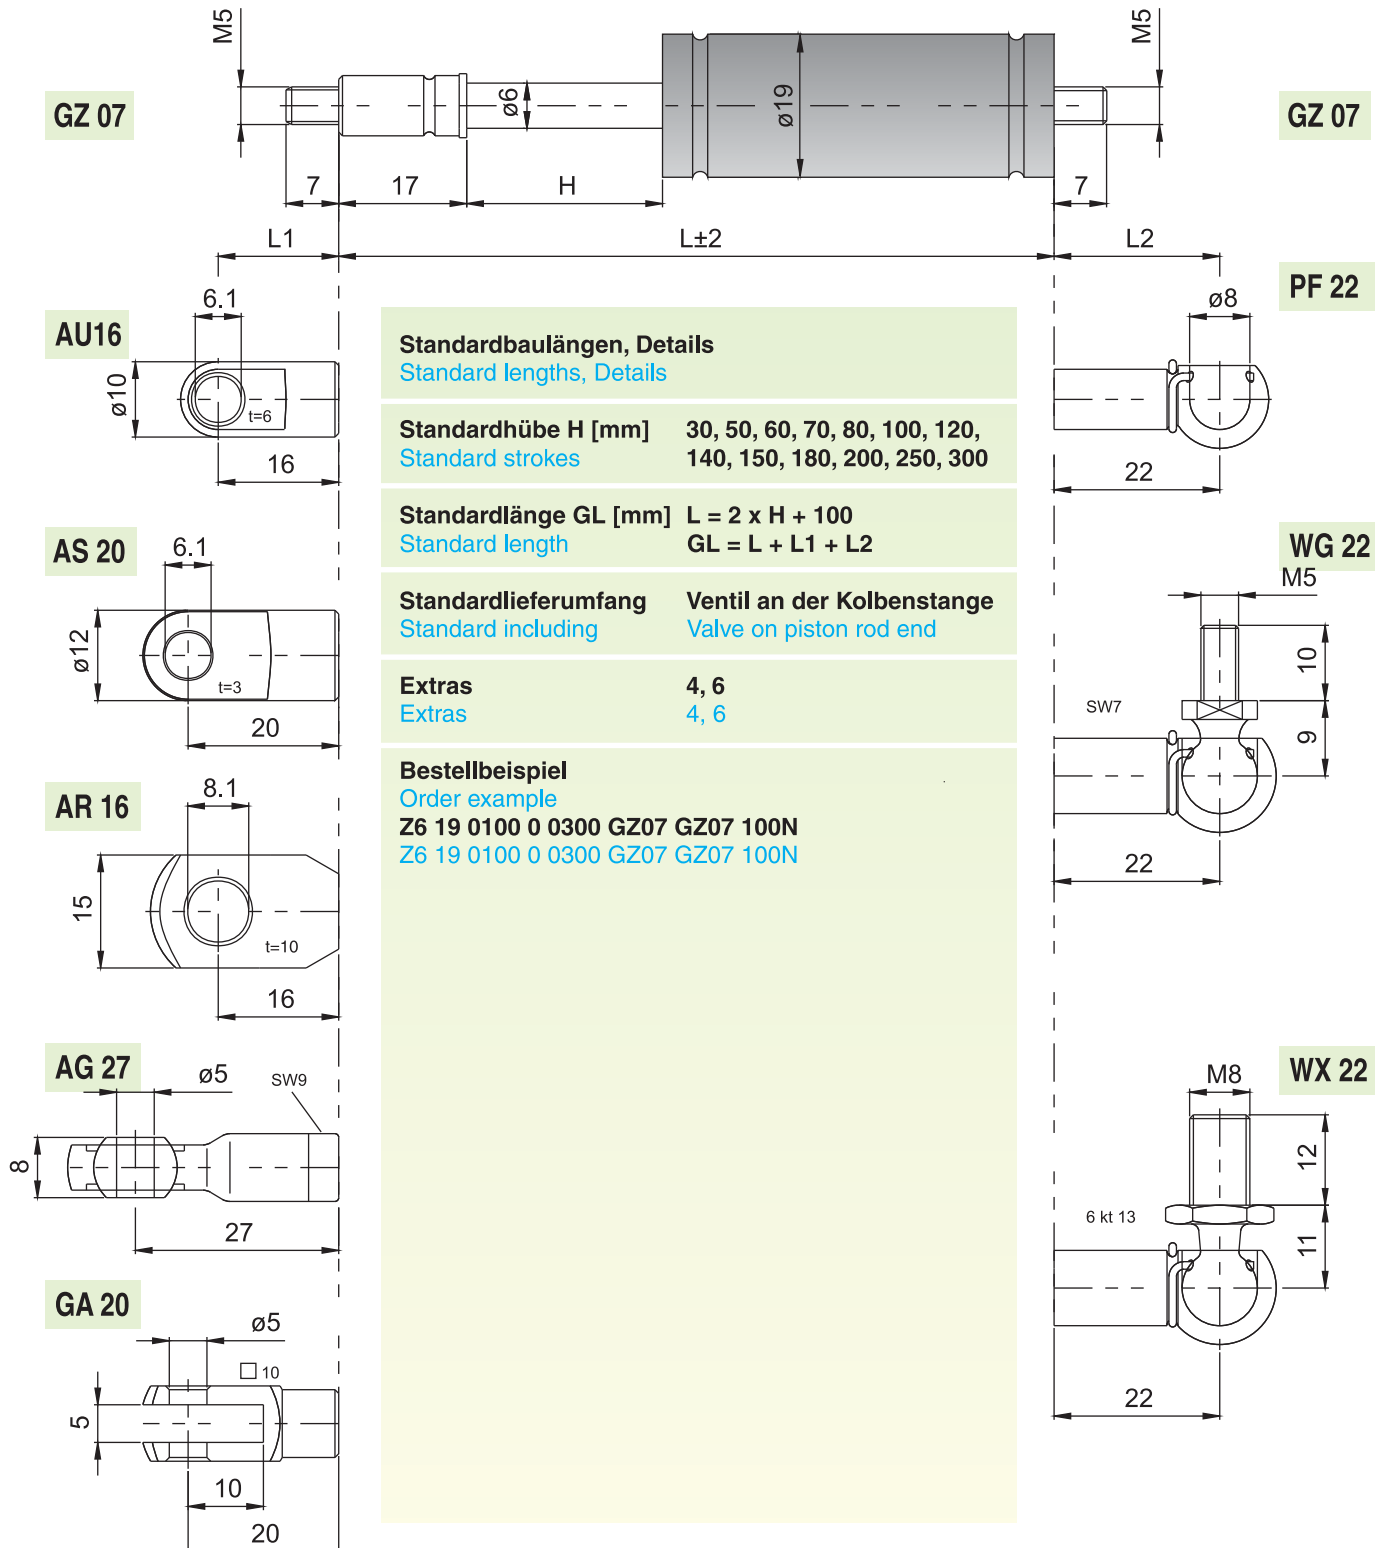

## Standardbaulängen, Details Standard lengths, Details

**Standardhübe H [mm]** 30, 50, 60, 70, 80, 100, 120,  
Standard strokes 140, 150, 180, 200, 250, 300

**Standardlänge GL [mm]**  $L = 2 \times H + 100$   
Standard length  $GL = L + L_1 + L_2$

**Standardlieferungsumfang** Ventil an der Kolbenstange  
Standard including Valve on piston rod end

**Extras** 4, 6  
Extras 4, 6

**Bestellbeispiel**  
Order example  
Z6 19 0100 0 0300 GZ07 GZ07 100N  
Z6 19 0100 0 0300 GZ07 GZ07 100N